


nero

Tutorial

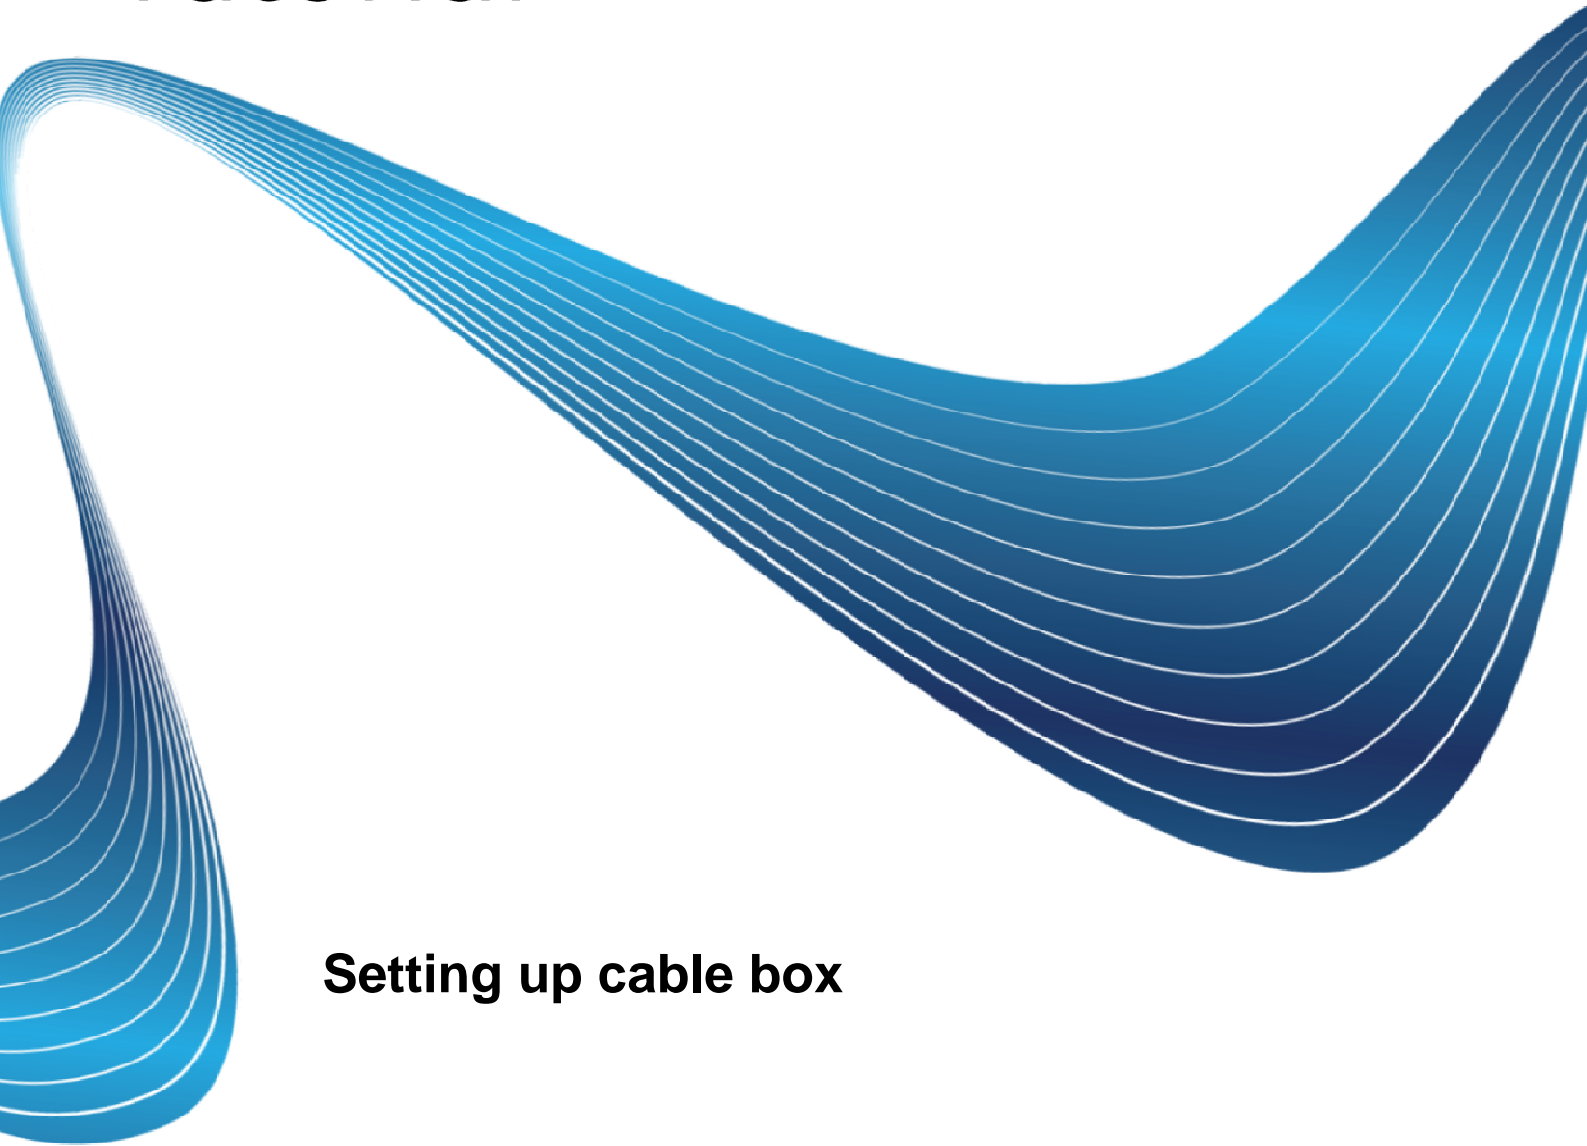

Setting up cable box

The tutorial and all its contents are protected by copyright and are the property of Nero AG. All rights reserved. This tutorial contains material that is protected by internationally valid copyright. No part of this tutorial may be reproduced, transmitted or transcribed without the express written permission of Nero AG. Nero AG rejects any claims that transcend the clauses of the guarantee rights. Nero AG does not undertake any liability for the correctness of the content of the tutorial. The contents of the tutorial may be changed without prior notice. All trade names and trademarks are the property of the respective owners. The trademarks mentioned here are named for information purposes only.

Nero AG, Im Stoeckmaedle 13-15, 76307 Karlsbad, Germany

Nero Inc. 330 N Brand Blvd Suite 800, Glendale, CA 91203-2335, USA

Nero KK Rover Center-kita 8F-B, 1-2-2 Nakagawa-chuou Tsuzuki-ku, Yokohama, Kanagawa, Japan 224-0003

www.nero.com, <http://support.nero.com>

Copyright © 2009 Nero AG and its licensors. All rights reserved.

Setting up cable box

In this tutorial you can follow the step by step procedure for configuring a cable box as TV source for Nero LiquidTV™.


This is just an example way to proceed. The detailed configurations depend on your provider and your requirements.

The following requirements have to be fulfilled:

- You have started the Nero LiquidTV™ Guided Setup
- You have passed the first basic steps

To allocate a cable box as TV source and to check the connection of this TV source, proceed as follows:

1. Select the **Cable box** option in the **Select TV Source** screen.
→ The **Hook up Cable Box** screen is displayed.
2. Select **Yes, I see video in the window** if you can see the video.
→ The **Is your cable box digital** screen is displayed.
3. Select **Yes** if you use a digital cable box.
→ The **Cable Provider** screen is displayed. The cable providers which are available in your area are listed here.
4. Select your cable provider.
→ The **Cable Channel Lineup** screen is displayed.
5. Click the select button.
→ Nero LiquidTV™ will ask you how to act with unclear channels.
6. Select the way you want Nero LiquidTV™ to act.
→ The **Review Cable Lineups** screen is displayed.
7. Click the select button.
→ The **Cable Lineup** screen is displayed.
8. Select **No** if this is not your lineup.
→ The **Premium Channels** screen is displayed.
9. Select **No** if you don't want to receive premium channels.
→ The **Cable Box Brand** screen is displayed.
10. Select the brand of your cable box.
→ The **Confirm IR Hookup** screen is displayed.
11. If you require help with the correct connection of your IR transceiver and the IR cable, use the **Help me make sure the IR cable is hooked up** button.
→ The **IR Cable into Computer** screen is displayed and shows you how to connect your IR transceiver and the IR cable. Afterwards the **Cable Channel Digits** screen is displayed.

- 
12. Select **005 (typical for digital cable)** if this is the way you enter your cable channel digits.
→ The **Cable "Enter" Button screen** is displayed.
 13. Select **No(typical)** if you don't need to press the Enter button on your remote control afterwards you have changed channels.
→ The **Channel Changing Tests** screen is displayed.
 14. Select **Press SELECT to continue**.
 15. The **Begin First Test** screen is displayed.
 16. Select **Begin the Test**.
→ The first test is started. The system will try to switch from channel to channel. The **What Happened?** screen is displayed afterwards.
 17. Select **The channel changed**.
→ You have configured Nero LiquidTV™ for your cable box.